
rituals Documentation

Release 0.3.1

Jürgen Hermann

2019-01-24

1	Overview	3
2	Important Links	5
3	Documentation Contents	7
3.1	User's Manual	7
3.1.1	Introduction	7
3.1.2	Adding Rituals to Your Project	8
3.1.3	Task Namespaces	8
3.1.3.1	The Root Namespace	8
3.1.3.2	Adding Local Task Definitions	9
3.1.3.3	Constructing Your Own Namespace	9
3.1.4	How-Tos	9
3.1.4.1	Change default project layout	9
3.1.4.2	Change default project configuration	10
3.2	Tasks Reference	10
3.2.1	Fundamental Tasks	10
3.2.1.1	Getting Help	10
3.2.1.2	Project Cleanup	10
3.2.1.3	Building the Project	11
3.2.1.4	Freezing Requirements	11
3.2.2	Executing Tests	11
3.2.3	Documentation Tasks	11
3.2.3.1	Building Sphinx Documentation	11
3.2.3.2	Publishing Documentation	11
3.2.4	Release Workflow	12
3.2.4.1	Managing Development Versions	12
3.2.4.2	Preparing a Release	12
3.2.4.3	Building a PEX Distribution	12
3.2.5	Continuous Integration	13
3.2.5.1	Jenkins	13
3.3	Configuration Reference	13
3.3.1	General Options	13
3.3.2	Options for 'test'	14
3.3.3	Options for 'docs'	14
3.3.4	Options for 'release'	14
3.3.5	Options for 'devpi'	15

3.4	Complete API Reference	15
3.4.1	rituals package	15
3.4.1.1	Subpackages	16
3.4.1.2	Submodules	22
3.4.1.3	rituals.config module	22
3.4.1.4	rituals.easy module	22
3.5	Contribution Guidelines	26
3.5.1	Overview	26
3.5.1.1	Reporting issues	26
3.5.1.2	Improving documentation	26
3.5.1.3	Code contributions	26
3.5.2	Details on contributing code	26
3.5.2.1	Set up a working development environment	26
3.5.2.2	Add your changes to a feature branch	27
3.5.2.3	Make sure your changes work	27
3.6	Software License	27
3.6.1	Full License Text	27
4	References	35
4.1	Tools	35
5	Indices and Tables	37
	Python Module Index	39

CHAPTER 1

Overview

“Rituals” is a task library for [Invoke](#) that keeps the most common tasks you always need out of your project, and makes them centrally maintained. This leaves your `tasks.py` small and to the point, with only things specific to the project at hand.

For more information, continue with the *User's Manual*.

CHAPTER 2

Important Links

- [GitHub Project](#)
- [Issue Tracker](#)
- [PyPI](#)
- [Latest Documentation](#)
- [Google Group](#)

3.1 User's Manual

3.1.1 Introduction

“Rituals” is a task library for `Invoke` that keeps the most common tasks you always need out of your project, and makes them centrally maintained. This leaves your `tasks.py` small and to the point, with only things specific to the project at hand.

The following lists the common task implementations that the `rituals.easy` module offers. See *below* on how to integrate them into your `tasks.py`.

- `help` – Default task, when invoked with no task names.
- `clean` – Perform house-cleaning.
- `build` – Build the project.
- `docs` – Build the documentation.
- `test` – Perform standard unittests.
- `check` – Perform source code checks.
- `release.bump` – Bump a development version.
- `release.dist` – Distribute the project.
- `release.prep` – Prepare for a release.
- ... and *many* more, see `inv -l` for a complete list.

The guiding principle for these tasks is to strictly separate low-level tasks for building and installing (via `setup.py`) from high-level convenience tasks a developer uses (via `invoke`). `Invoke` tasks can use *Setuptools* ones as building blocks, but never the other way ‘round – this avoids any bootstrapping headaches during package installations.

Use `inv -h <task>` as usual to get details on the options of these tasks. The *Tasks Reference* explains them in more detail. Look at the modules in `rituals.acts` if you want to know every nuance of what these tasks do.

**Note:**

The easiest way to get a working project using `rituals` is the `py-generic-project` cookiecutter archetype, which is tightly integrated with the tasks defined here.

That way you have a working project skeleton within minutes that is fully equipped, with all aspects of building, testing, quality checks, continuous integration, documentation, and releasing covered.

3.1.2 Adding Rituals to Your Project

First of all, include `rituals` as a dependency in your `dev-requirements.txt` or a similar file, to get a release from PyPI. To refer to the current GitHub master branch instead, use a `pip` requirement like this:

```
-e git+https://github.com/jhermann/rituals.git#egg=rituals
```

Then at the start of your `tasks.py`, use the following statement to define *all* tasks that are considered standard:

```
from rituals.easy import *
```

This works by defining the namespace identifier containing Ritual's default tasks. Note that it also defines `Invoke`'s `Collection` and `task` identifiers, and some other common helpers assembled in `rituals.easy`. Rituals' own `tasks.py` can serve as an example.

Of course, you may also do more selective imports, or build your own *Invoke* namespaces with the specific tasks you need.

Warning: These tasks expect an importable `setup.py` that defines a `project` dict with the setup parameters, see `rudiments` and `py-generic-project` for examples. The needed changes are minimal:

```
project = dict( # this would usually be a setup(...) call
    name='...',
    ...
)
if __name__ == '__main__':
    setup(**project)
```

3.1.3 Task Namespaces

3.1.3.1 The Root Namespace

The tasks useful for any (Python) project are organized in a root namespace. When you use the `from rituals.easy import *` statement, that also imports this root namespace. By convention of *Invoke*, when the identifier namespace is defined, that one is taken instead of constructing one automatically from all defined tasks.

It contains some fundamentals like `clean`, and nested namespaces handling specific topics. Examples of nested namespaces are `test`, `check`, `docs`, and `release`. See *Tasks Reference* for a complete list.

The root namespace has `help` as the default task, and most nested namespaces also have a default with the most commonly performed action. These default tasks are automatically aliased to the name of the namespace, so for example `docs.sphinx` can also be called as `docs`.

3.1.3.2 Adding Local Task Definitions

Having an explicit root namespace means that within `tasks.py`, you need to register your own tasks using its `add_task` method, if you want them to be available as top-level names:

```
@task
def my_own_task(ctx):
    """Something project-specific."""
    ...

namespace.add_task(my_own_task)
```

Rituals' own `tasks.py` uses this to add some local tasks.

Another strategy is to add them in bulk, so when you write a new task you cannot forget to make it visible:

```
# Register local tasks in root namespace
from invoke import Task
for _task in globals().values():
    if isinstance(_task, Task) and _task.body.__module__ == __name__:
        namespace.add_task(_task)
```

Add the above snippet to the *end* of your `tasks.py`, and every *local* task definition gets added to the root namespace.

3.1.3.3 Constructing Your Own Namespace

When you want to have more control, you can exclude the `namespace` identifier from the import and instead define your own. This example taken from the `tasks.py` of `py-generic-project` shows how it's done:

```
from rituals.easy import task, Collection
from rituals.acts.documentation import namespace as _docs

...

namespace = Collection.from_module(sys.modules[__name__], name='')
namespace.add_collection(_docs)
```

Note that the `name=''` makes this a root namespace. If you need to be even more selective, import individual tasks from modules in `rituals.acts` and add them to your namespaces.

3.1.4 How-Tos

3.1.4.1 Change default project layout

By default, sources are expected in `src/<packagename>` and tests in `src/tests`.

You can change this by calling one of the following functions, directly after the import from `rituals.invoke_tasks`.

- `config.set_maven_layout()` – Changes locations to `src/main/python/<packagename>` and `src/test/python`.

- `config.set_flat_layout()` – Changes locations to `<packagename>` and tests.

3.1.4.2 Change default project configuration

If you want to override the configuration defaults of various tasks, without using environment variables, add an `invoke.yaml` file in the same directory where your `tasks.py` is located – usually the project root directory.

This example makes *Sphinx* (as called by the default `docs` task) place generated files in the top-level `build` directory instead of a sub-directory in `docs`.

Listing 1: `invoke.yaml`

```
rituals:
  docs:
    build: ../build/_html
```

See *Configuration Reference* for a list of possible options.

3.2 Tasks Reference

Please make sure you also read the section on *Task Namespaces*.

3.2.1 Fundamental Tasks

3.2.1.1 Getting Help

`help` is the default task in the root namespace, so that just calling `inv` gives a reasonable response. It combines the global help (`inv -h`) and the task listing (`inv -l`).

3.2.1.2 Project Cleanup

The `clean` task gets rid of various groups of generated files, selectable by options. These options are:

```
-a, --all           The same as --backups --bytecode --dist --docs
-b, --backups      Also clean '*~' files etc.
-d, --docs         Also clean the documentation build area
-e, --extra        Any extra patterns, space-separated and possibly quoted
-i, --dist         Also clean the 'dist' dir
-t, --tox          Include '.tox' directory
-v, --venv         Include an existing virtualenv (in '.' or in '.venv')
-y, --bytecode     Also clean '.pyc', '.pyo', and package metadata
```

Note that `--all` is selective and only cleans out ‘cheap’ files; it especially excludes a local virtualenv that carries state (installed packages) you might not have recorded safely in requirements files yet, and the tree generated by `tox` that can take a while to reproduce.

The `--extra` options allows you to add any custom glob patterns to clean out.

3.2.1.3 Building the Project

Invoking `build` just delegates to `setup.py` right now. In the future, automatic detection of other project components like a Maven POM or Javascript build files might trigger additional build tools.

You can also include the `docs` task by adding the `--docs` option.

3.2.1.4 Freezing Requirements

Calling `freeze` writes the frozen requirements as found in the current environment into the file `frozen-requirements.txt`, by calling `pip freeze`.

3.2.2 Executing Tests

The `test.pytest` and `test.tox` tasks call the related testing tools with appropriate parameters. Coverage configuration is added to the `py.test` call, and if you pass the `--coverage` option, the generated report is loaded into your web browser. In case the `py.test` command isn't available, calling the test runner is delegated to `setup.py`.

For `test.tox`, `PATH` is extended according to the directories in the `rituals.snakepits` configuration value, which defaults to `/opt/pyenv/bin:/opt/pyrun/bin`. That way, you can provide the *Python* interpreter versions to run multi-environment tests locally.

3.2.3 Documentation Tasks

3.2.3.1 Building Sphinx Documentation

Rituals provides automatic process management of a `sphinx-autobuild` daemon, which means you easily get a live-reload preview in your browser. To start the build watchdog, use `inv docs -w -b`. The `-b` means to open a new browser tab, after the server process is ready. To kill the server, call the `inv docs -k` command. You can check on the status of a running daemon with `inv docs -s`.

Note that sometimes you have to manually trigger a full rebuild via `inv docs --clean`, especially when you make structural changes (e.g. adding new chapters to the main toc-tree). Your browser will change the view to an empty canvas, just initiate a reload (`Ctrl-R`) when the build is done. Typically this is needed when the sidebar TOC is out of sync, which happens due to the optimizations in `sphinx-autobuild` that make it so responsive.

3.2.3.2 Publishing Documentation

To upload documentation to either PyPI or a WebDAV server (like *Artifactory*), you can use the `docs.upload` tasks after using `docs.sphinx`. By default, the [documentation hosting of PyPI](#) is used.

To enable a local documentation server, set the following environment variables (e.g. in your `~/ .bashrc`):

```
export INVOKE_RITUALS_DOCS_UPLOAD_METHOD=webdav
export INVOKE_RITUALS_DOCS_UPLOAD_TARGETS_WEBDAV_URL='http://repo.example.com/
↪artifactory/wwwdata-local/python/{name}/{version}/{name}-{version}.zip;kind=docs'
```

This example shows a configuration for an Artifactory server, and as you can see the name and version of the project can be used to generate appropriate URLs. The version defaults to `latest`, unless you provide a specific version number via the `--release` option. To use the upload in a browser, add `!/index.html` to the URL of the ZIP file, and make sure the configuration of your Artifactory installation correctly handles image and other relevant MIME types.

Note that you can override the default upload method using the `target` option, i.e. adding `--target pypi` to your task invocation will upload the docs to PyPI no matter what.

Note: The WebDAV upload is tested with Artifactory 4.x, if you encounter problems with other repository servers, open a ticket so support for them can be added.

3.2.4 Release Workflow

3.2.4.1 Managing Development Versions

For intermediate test releases, you can automatically generate a dev version compliant to [PEP-440](#). The `release.bump` task generates this version, and rewrites the `tag_build` value in `setup_cfg`. For this to work, the config file must already exist, and contain a line with an existing `tag_build` setting, like this:

```
[egg_info]
tag_build = .dev
tag_date = false
```

The created version strives to uniquely describe the code being packaged, so it can get quite lengthy. The “worst case scenario” when it comes to length looks like this: `1.2.2.dev4+1.2.1.g07c5047.20170309t1247.ci.42`.

Let’s dissect this:

- `1.2.2` is the next-release version as reported by `setup.py`.
- `.dev4` means we are 4 commits beyond the last release version.
- `1.2.1` is that last release version, found via checking the annotated `git` tags.
- `g07c5047` is the `git` commit hash of the `HEAD` ref.
- Having the `20170309t1247` timestamp means the working directory at the time of the task execution was dirty (had uncommitted changes).
- `ci.42` is appended when the environment contains a `BUILD_ID` variable (in this case, set to 42).

Use the `--pypi` option to prevent creation of the local part of the version info (anything after the `+`). This allows you to push development versions to PyPI for open beta release testing. In those cases, you should commit `setup.cfg` with the specific `tag_build` setting, and then `git tag` that commit.

Adding `-v` for verbosity shows a few more details of assembling the version information. Right now, only `git` is really supported regarding SCM metadata. Anything else will give you `Unsupported SCM` warnings when using this and some other tasks.

3.2.4.2 Preparing a Release

`release.prep` performs QA checks, and switches to non-dev versioning.

TODO


3.2.4.3 Building a PEX Distribution

TODO

3.2.5 Continuous Integration

3.2.5.1 Jenkins

Note that tasks related to *Jenkins* are only available by default when the environment variable `JENKINS_URL` is defined.

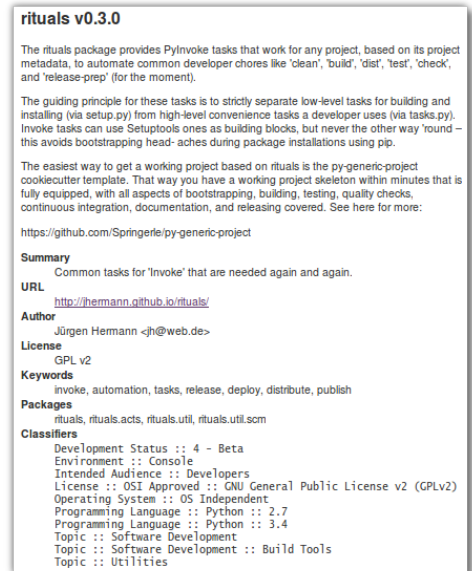

The `jenkins.description` task creates a text file (by default `build/project.html`) that can be used via the [Jenkins Description Setter](#) plugin to dynamically fill the Jenkins job description from already available metadata. The resulting description looks like the example on the right.

3.3 Configuration Reference

Please read [Invoke's Configuration Guide](#) on the concepts and basic mechanisms of its hierarchy of configuration files, environment variables, task namespaces and CLI flags. This reference guide lists the configuration options specific to tasks provided by *Rituals*.

Note: In the following tables of configurations settings, the root namespace of 'rituals' is implied, so to access them in a task you'd use `ctx.rituals.<name>`, and `INVOKE_RITUALS_<NAME>` to define an environment variable.

3.3.1 General Options

To make Python versions available that are not part of the host's default installation, `rituals.snakepits` is used, e.g. when performing multi-environment testing. The default is `/opt/pyenv/bin:/opt/pyrun/bin`.

Name	Description
snakepits	Lookup path for Python interpreters

3.3.2 Options for ‘test’

If one of the directories in `rituals.snakepits` exists, it’s added to the `PATH` of `tox`.

3.3.3 Options for ‘docs’

The defaults for the `docs` task should almost always fit, but if you need to change them, you can.

Name	Description
<code>docs.sources</code>	Documentation source folder (<code>docs</code>)
<code>docs.build</code>	Build area within the source folder (<code>_build</code>)
<code>docs.watchdog.host</code>	IP to bind <code>sphinx-autobuild</code> to (<code>127.0.0.1</code>)
<code>docs.watchdog.port</code>	Port to bind <code>sphinx-autobuild</code> to (<code>8840</code>)

3.3.4 Options for ‘release’

When `release.prep` changes the project configuration for a release and then tags the resulting changeset, the values from the following table are used for messages and names.

Name	Description
<code>release.commit.message</code>	Message used (<code>:package: Release v{version}</code>)
<code>release.tag.name</code>	Release tag (<code>v{version}</code>)
<code>release.tag.message</code>	Tag annotation (<code>Release v{version}</code>)

The `release.pex` task has an `--upload` option to upload the created archive to a WebDAV repository, e.g. a local [Artifactory](#) server or to [Bintray](#). The best way to make this usable in each of your projects is to insert the base URL of your Python repository into your shell environment:

```
export INVOKE_RITUALS_RELEASE_UPLOAD_BASE_URL=\
"http://repo.example.com/artifactory/pypi-releases-local/"
```

Name	Description
<code>release.upload.base_url</code>	WebDAV server end-point
<code>release.upload.path</code>	WebDAV path (<code>{name}/{version}/{filename}</code>)

The following settings are used when building self-contained releases that integrate [eGenix PyRun](#).

Name	Description
<code>pyrun.version</code>	The version of <i>PyRun</i> to use (e.g. <code>2.1.0</code>)
<code>pyrun.python</code>	The version of <i>Python</i> to use (<code>2.6</code> , <code>2.7</code> , or <code>3.4</code>)
<code>pyrun.ucs</code>	Unicode code points size (<code>ucs2</code> or <code>ucs4</code>)
<code>pyrun.platform</code>	The platform ID (e.g. <code>linux-x86_64</code> , <code>macosx-10.5-x86_64</code>)
<code>pyrun.base_url</code>	Download location base URL pattern
<code>pyrun.archive</code>	Download location file name pattern

The `rituals.pyrun.base_url` value can be a local `http[s]` URL of an [Artifactory](#) repository or some similar webserver, or else a `file://` URL of a file system cache. Note that you should keep the unchanged name of the original download location, i.e. do not change `rituals.pyrun.archive`. The location patterns can contain the `pyrun` settings as placeholders, e.g. `{version}`.

This sets a local download cache:

```
export INVOKE_RITUALS_PYRUN_BASE_URL="file://$HOME/Downloads"
```

You have to download the *PyRun* releases you plan to use to that directory, using your browser or `curl`.

3.3.5 Options for ‘devpi’

When you call the `devpi.refresh` task without any option, the value of `rituals.devpi.requirements` is the name of the file parsed for the list of packages to refresh in the active `devpi` server. It defaults to `dev-requirements.txt`.

Name	Description
<code>devpi.requirements</code>	Name of requirements file to use for refreshing

3.4 Complete API Reference

The following is a complete API reference generated from source.

3.4.1 rituals package

Common tasks for ‘Invoke’ that are needed again and again.

The `rituals` package provides PyInvoke tasks that work for any project, based on its project metadata, to automate common developer chores like ‘clean’, ‘build’, ‘dist’, ‘test’, ‘check’, and ‘release-prep’ (for the moment).

The guiding principle for these tasks is to strictly separate low-level tasks for building and installing (via `setup.py`) from high-level convenience tasks a developer uses (via `tasks.py`). Invoke tasks can use Setuptools ones as building blocks, but never the other way ‘round – this avoids bootstrapping head-aches during package installations using `pip`.

The easiest way to get a working project based on `rituals` is the `py-generic-project` cookiecutter template. That way you have a working project skeleton within minutes that is fully equipped, with all aspects of bootstrapping, building, testing, quality checks, continuous integration, documentation, and releasing covered. See here for more:

<https://github.com/Springerle/py-generic-project>

Copyright 2015 - 2019 Jürgen Hermann

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License version 2 as published by the Free Software Foundation.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

The full LICENSE file and source are available at

<https://github.com/jhermann/rituals>

3.4.1.1 Subpackages

rituals.acts package

rituals.acts – Task building blocks.

Submodules

rituals.acts.basic module

Basic tasks.

rituals.acts.devpi module

‘devpi’ tasks.

`rituals.acts.devpi.get_devpi_url` (*ctx*)
Get currently used ‘devpi’ base URL.

rituals.acts.documentation module

‘docs’ tasks.

class `rituals.acts.documentation.DocsUploader` (*ctx, cfg, target*)
Bases: `object`

Helper to perform an upload of pre-built docs.

upload (*docs_base, release*)
Upload docs in *docs_base* to the target of this uploader.

`rituals.acts.documentation.get_pypi_auth` (*configfile=u'~/pypirc'*)
Read auth from pip config.

`rituals.acts.documentation.watchdogctl` (*ctx, kill=False, verbose=True*)
Control / check a running Sphinx autobuild process.

rituals.acts.github module

GitHub automation.

rituals.acts.inspection module

‘docs’ tasks.

rituals.acts.jenkins module

Tasks specific to Jenkins.

rituals.acts.pkgdeb module

'deb' tasks.

rituals.acts.releasing module

Release tasks.

`rituals.acts.releasing.get_egg_info` (*cfg*, *verbose=False*)
Call 'setup egg_info' and return the parsed meta-data.

rituals.acts.testing module

Testing tasks.

rituals.util package

rituals.util – Helper modules.

`rituals.util.add_dir2pypath` (*path*)
Add given directory to PYTHONPATH, e.g. for pylint.

`rituals.util.search_file_upwards` (*name*, *base=None*)
Search for a file named *name* from cwd or given directory to root. Return None if nothing's found.

Subpackages

rituals.util.scm package

rituals.util.scm – Source Code Management support.

`rituals.util.scm.auto_detect` (*workdir*)
Return string signifying the SCM used in the given directory.
Currently, 'git' is supported. Anything else returns 'unknown'.

`rituals.util.scm.provider` (*workdir*, *commit=True*, ***kwargs*)
Factory for the correct SCM provider in *workdir*.

Submodules

rituals.util.scm.base module

Provider base class.

class `rituals.util.scm.base.ProviderBase` (*workdir*, *commit=True*, ***kwargs*)
Bases: object

Base class for SCM providers.

run (*cmd*, **args*, ***kwargs*)
Run a command.

run_elective (*cmd*, **args*, ***kwargs*)
Run a command, or just echo it, depending on *commit*.

rituals.util.scm.git module

git SCM provider.

class `rituals.util.scm.git.GitProvider` (*workdir*, *commit=True*, ***kwargs*)
Bases: `rituals.util.scm.base.ProviderBase`

git SCM provider.

Expects a working *git* executable in the path, having a reasonably current version.

add_file (*filename*)
Stage a file for committing.

commit (*message*)
Commit pending changes.

key = `u'git'`

pep440_dev_version (*verbose=False*, *non_local=False*)
Return a PEP-440 dev version appendix to the main version number.

Result is `None` if the *workdir* is in a release-ready state (i.e. clean and properly tagged).

tag (*label*, *message=None*)
Tag the current *workdir* state.

workdir_is_clean (*quiet=False*)
Check for uncommitted changes, return `True` if everything is clean.

Inspired by <http://stackoverflow.com/questions/3878624/>.

rituals.util.scm.null module

Provider for unknown SCM systems.

class `rituals.util.scm.null.NullProvider` (*workdir*, *commit=True*, ***kwargs*)
Bases: `rituals.util.scm.base.ProviderBase`

Stub provider for unknown SCM systems.

This implements the provider interface, mostly emitting warnings.

add_file (*filename*)
Stage a file for committing, or commit it directly (depending on the SCM).

commit (*message*)
Commit pending changes.

key = `u'unknown'`

pep440_dev_version (*verbose=False*, *non_local=False*)
Return a PEP-440 dev version appendix to the main version number.

tag (*label*, *message=None*)
Tag the current *workdir* state.

workdir_is_clean (*quiet=False*)
Check for uncommitted changes, return `True` if everything is clean.

Submodules

rituals.util.antglob module

Recursive globbing with ant-style syntax.

class `rituals.util.antglob.FileSet` (*root, patterns*)

Bases: `object`

Ant-style file and directory matching.

Produces an iterator of all of the files that match the provided patterns. Note that directory matches must end with a slash, and if they're exclusions, they won't be scanned (which prunes anything in that directory that would otherwise match).

Directory specifiers: `**` matches zero or more directories. `/` path separator.

File specifiers:

- glob style wildcard.

[chars] inclusive character sets. [^chars] exclusive character sets.

Examples

/*.py recursively match all python files. foo//.py recursively match all python files in the 'foo' directory. *.py match all the python files in the current directory. */.txt match all the text files in top-level directories. foo/**/* all files under directory 'foo'. */ top-level directories. foo/ the directory 'foo' itself. */foo/ any directory named 'foo'. **/* hidden files. **/*/ hidden directories.*

included (*path, is_dir=False*)

Check patterns in order, last match that includes or excludes *path* wins. Return *None* on undecided.

walk (***kwargs*)

Like *os.walk* and taking the same keyword arguments, but generating paths relative to the root.

Starts in the fileset's root and filters based on its patterns. If *with_root=True* is passed in, the generated paths include the root path.

`rituals.util.antglob.includes` (*pattern*)

A single inclusive glob pattern.

`rituals.util.antglob.excludes` (*pattern*)

A single exclusive glob pattern.

rituals.util.filesys module

File system helpers.

`rituals.util.filesys.pretty_path` (*path, _home_re=<_sre.SRE_Pattern object>*)

Prettify path for humans, and make it Unicode.

`rituals.util.filesys.pushd` (**args, **kws*)

A context that enters a given directory and restores the old state on exit.

The original directory is returned as the context variable.

`rituals.util.filesys.url_as_file(*args, **kws)`

Context manager that GETs a given *url* and provides it as a local file.

The file is in a closed state upon entering the context, and removed when leaving it, if still there.

To give the file name a specific extension, use *ext*; the extension can optionally include a separating dot, otherwise it will be added.

Parameters

- **url** (*str*) – URL to retrieve.
- **ext** (*str*, *optional*) – Extension for the generated filename.

Yields *str* – The path to a temporary file with the content of the URL.

Raises `requests.RequestException` – Base exception of `requests`, see its docs for more detailed ones.

Example

```
>>> import io, re, json
>>> with url_as_file('https://api.github.com/meta', ext='json') as meta:
...     meta, json.load(io.open(meta, encoding='ascii'))['hooks']
(u'/tmp/www-api.github.com-Ba5OhD.json', [u'192.30.252.0/22'])
```

rituals.util.notify module

Log notification messages to console.

`rituals.util.notify.banner(msg)`

Emit a banner just like `Invoke's run(..., echo=True)`.

`rituals.util.notify.error(msg)`

Emit an error message to `stderr`.

`rituals.util.notify.failure(msg)`

Emit a fatal message and exit.

`rituals.util.notify.info(msg)`

Emit a normal message.

`rituals.util.notify.warning(msg)`

Emit a warning message.

rituals.util.shell module

Shell command calls.

`rituals.util.shell.capture(cmd, **kw)`

Run a command and return its stripped captured output.

`rituals.util.shell.run(cmd, **kw)`

Run a command and flush its output.

rituals.util.which module

Find the full path to commands.

which(command, path=None, verbose=0, exts=None) Return the full path to the first match of the given command on the path.

whichall(command, path=None, verbose=0, exts=None) Return a list of full paths to all matches of the given command on the path.

whichgen(command, path=None, verbose=0, exts=None) Return a generator which will yield full paths to all matches of the given command on the path.

By default the PATH environment variable is searched (as well as, on Windows, the AppPaths key in the registry), but a specific 'path' list to search may be specified as well. On Windows, the PATHEXT environment variable is applied as appropriate.

If “**verbose**” is true then a tuple of the form (<fullpath>, <matched-where-description>)

is returned for each match. The latter element is a textual description of where the match was found. For example:

```
from PATH element 0 from HKLMSOFTWARE... perl.exe
```

exception rituals.util.which.**WhichError**

Bases: exceptions.Exception

Executable not found by *which* module.

rituals.util.which.**which** (command, path=None, verbose=0, exts=None)

Return the full path to the first match of the given command on the path.

“command” is a the name of the executable to search for. “path” is an optional alternate path list to search. The default it

to use the PATH environment variable.

“**verbose**”, if true, will cause a 2-tuple to be returned. The second element is a textual description of where the match was found.

“**exts**” optionally allows one to specify a list of extensions to use instead of the standard list for this system. This can effectively be used as an optimization to, for example, avoid stat’s of “foo.vbs” when searching for “foo” and you know it is not a VisualBasic script but “.vbs” is on PATHEXT. This option is only supported on Windows.

If no match is found for the command, a WhichError is raised.

rituals.util.which.**whichall** (command, path=None, verbose=0, exts=None)

Return a list of full paths to all matches of the given command on the path.

“command” is a the name of the executable to search for. “path” is an optional alternate path list to search. The default it

to use the PATH environment variable.

“**verbose**”, if true, will cause a 2-tuple to be returned for each match. The second element is a textual description of where the match was found.

“**exts**” optionally allows one to specify a list of extensions to use instead of the standard list for this system. This can effectively be used as an optimization to, for example, avoid stat’s of “foo.vbs” when searching for “foo” and you know it is not a VisualBasic script but “.vbs” is on PATHEXT. This option is only supported on Windows.

`rituals.util.which.whichgen (command, path=None, verbose=0, exts=None)`

Return a generator of full paths to the given command.

“command” is the name of the executable to search for. “path” is an optional alternate path list to search. The default is

to use the PATH environment variable.

“verbose”, if true, will cause a 2-tuple to be returned for each match. The second element is a textual description of where the match was found.

“exts” optionally allows one to specify a list of extensions to use instead of the standard list for this system. This can effectively be used as an optimization to, for example, avoid stat’s of “foo.vbs” when searching for “foo” and you know it is not a VisualBasic script but “.vbs” is on PATHEXT. This option is only supported on Windows.

This method returns a generator which yields either full paths to the given command or, if verbose, tuples of the form (<path to command>, <where path found>).

3.4.1.2 Submodules

3.4.1.3 rituals.config module

Project configuration and layout.

`rituals.config.get_project_root ()`

Determine location of *tasks.py*.

`rituals.config.load ()`

Load and return configuration as a Bunch.

Values are based on DEFAULTS, and metadata from *setup.py*.

`rituals.config.set_flat_layout ()`

Switch default project layout to everything top-level.

`rituals.config.set_maven_layout ()`

Switch default project layout to Maven-like.

3.4.1.4 rituals.easy module

Default namespace for convenient wildcard import in task definition modules.

class `rituals.easy.Collection (*args, **kwargs)`

Bases: `object`

A collection of executable tasks. See */concepts/namespaces*.

New in version 1.0.

add_collection (*coll*, *name=None*)

Add *Collection coll* as a sub-collection of this one.

Parameters

- **coll** – The *Collection* to add.
- **name** (*str*) – The name to attach the collection as. Defaults to the collection’s own internal name.

New in version 1.0.

add_task (*task*, *name=None*, *aliases=None*, *default=None*)

Add *.Task* *task* to this collection.

Parameters

- **task** – The *.Task* object to add to this collection.
- **name** – Optional string name to bind to (overrides the task’s own self-defined *name* attribute and/or any Python identifier (i.e. *.func_name*).
- **aliases** – Optional iterable of additional names to bind the task as, on top of the primary name. These will be used in addition to any aliases the task itself declares internally.
- **default** – Whether this task should be the collection default.

New in version 1.0.

configuration (*taskpath=None*)

Obtain merged configuration values from collection & children.

Parameters **taskpath** – (Optional) Task name/path, identical to that used for *~.Collection.__getitem__* (e.g. may be dotted for nested tasks, etc.) Used to decide which path to follow in the collection tree when merging config values.

Returns A *dict* containing configuration values.

New in version 1.0.

configure (*options*)

(Recursively) merge *options* into the current *.configuration*.

Options configured this way will be available to all tasks. It is recommended to use unique keys to avoid potential clashes with other config options

For example, if you were configuring a Sphinx docs build target directory, it’s better to use a key like *'sphinx.target'* than simply *'target'*.

Parameters **options** – An object implementing the dictionary protocol.

Returns *None*.

New in version 1.0.

classmethod from_module (*module*, *name=None*, *config=None*, *loaded_from=None*, *auto_dash_names=None*)

Return a new *.Collection* created from *module*.

Inspects *module* for any *.Task* instances and adds them to a new *.Collection*, returning it. If any explicit namespace collections exist (named *ns* or *namespace*) a copy of that collection object is preferentially loaded instead.

When the implicit/default collection is generated, it will be named after the module’s *__name__* attribute, or its last dotted section if it’s a submodule. (I.e. it should usually map to the actual *.py* filename.)

Explicitly given collections will only be given that module-derived name if they don’t already have a valid *.name* attribute.

If the module has a docstring (*__doc__*) it is copied onto the resulting *.Collection* (and used for display in help, list etc output.)

Parameters

- **name** (*str*) – A string, which if given will override any automatically derived collection name (or name set on the module’s root namespace, if it has one.)

- **config** (*dict*) – Used to set config options on the newly created *.Collection* before returning it (saving you a call to *.configure*.)

If the imported module had a root namespace object, `config` is merged on top of it (i.e. overriding any conflicts.)

- **loaded_from** (*str*) – Identical to the same-named kwarg from the regular class constructor - should be the path where the module was found.
- **auto_dash_names** (*bool*) – Identical to the same-named kwarg from the regular class constructor - determines whether emitted names are auto-dashed.

New in version 1.0.

serialized()

Return an appropriate-for-serialization version of this object.

See the documentation for *.Program* and its `json` task listing format; this method is the driver for that functionality.

New in version 1.0.

subcollection_from_path (*path*)

Given a *path* to a subcollection, return that subcollection.

New in version 1.0.

subtask_name (*collection_name, task_name*)

task_names

Return all task identifiers for this collection as a one-level dict.

Specifically, a dict with the primary/”real” task names as the key, and any aliases as a list value.

It basically collapses the namespace tree into a single easily-scannable collection of invocation strings, and is thus suitable for things like flat-style task listings or transformation into parser contexts.

New in version 1.0.

task_with_config (*name*)

Return task named *name* plus its configuration dict.

E.g. in a deeply nested tree, this method returns the *.Task*, and a configuration dict created by merging that of this *.Collection* and any nested *Collections* *<.Collection>*, up through the one actually holding the *.Task*.

See *~.Collection.__getitem__* for semantics of the *name* argument.

Returns Two-tuple of (*.Task, dict*).

New in version 1.0.

to_contexts ()

Returns all contained tasks and subtasks as a list of parser contexts.

New in version 1.0.

transform (*name*)

Transform *name* with the configured auto-dashes behavior.

If the collection’s `auto_dash_names` attribute is `True` (default), all non leading/trailing underscores are turned into dashes. (Leading/trailing underscores tend to get stripped elsewhere in the stack.)

If it is `False`, the inverse is applied - all dashes are turned into underscores.

New in version 1.0.

```
rituals.easy.task(*args, **kwargs)
```

Marks wrapped callable object as a valid Invoke task.

May be called without any parentheses if no extra options need to be specified. Otherwise, the following keyword arguments are allowed in the parentheses'd form:

- **name:** Default name to use when binding to a *.Collection*. Useful for avoiding Python namespace issues (i.e. when the desired CLI level name can't or shouldn't be used as the Python level name.)
- **aliases:** Specify one or more aliases for this task, allowing it to be invoked as multiple different names. For example, a task named `mytask` with a simple `@task` wrapper may only be invoked as `"mytask"`. Changing the decorator to be `@task(aliases=['myothertask'])` allows invocation as `"mytask"` or `"myothertask"`.
- **positional:** Iterable overriding the parser's automatic "args with no default value are considered positional" behavior. If a list of arg names, no args besides those named in this iterable will be considered positional. (This means that an empty list will force all arguments to be given as explicit flags.)
- **optional:** Iterable of argument names, declaring those args to have optional values. Such arguments may be given as value-taking options (e.g. `--my-arg=myvalue`, wherein the task is given `"myvalue"`) or as Boolean flags (`--my-arg`, resulting in `True`).
- **iterable:** Iterable of argument names, declaring them to build iterable values.
- **incrementable:** Iterable of argument names, declaring them to increment their values.
- **default:** Boolean option specifying whether this task should be its collection's default task (i.e. called if the collection's own name is given.)
- **auto_shortflags:** Whether or not to automatically create short flags from task options; defaults to `True`.
- **help:** Dict mapping argument names to their help strings. Will be displayed in `--help` output.
- **pre, post:** Lists of task objects to execute prior to, or after, the wrapped task whenever it is executed.
- **autoprint:** Boolean determining whether to automatically print this task's return value to standard output when invoked directly via the CLI. Defaults to `False`.
- **klass:** Class to instantiate/return. Defaults to *.Task*.

If any non-keyword arguments are given, they are taken as the value of the `pre` kwarg for convenience's sake. (It is an error to give both `*args` and `pre` at the same time.)

New in version 1.0.

Changed in version 1.1: Added the `klass` keyword argument.

```
rituals.easy.pushd(*args, **kws)
```

A context that enters a given directory and restores the old state on exit.

The original directory is returned as the context variable.

```
rituals.easy.fail(message, exitcode=1)
```

Exit with error code and message.

3.5 Contribution Guidelines

3.5.1 Overview

Contributing to this project is easy, and reporting an issue or adding to the documentation also improves things for every user. You don't need to be a developer to contribute.

3.5.1.1 Reporting issues

Please use the *GitHub issue tracker*, and describe your problem so that it can be easily reproduced. Providing relevant version information on the project itself and your environment helps with that.

3.5.1.2 Improving documentation

The easiest way to provide examples or related documentation that helps other users is the *GitHub wiki*.

If you are comfortable with the Sphinx documentation tool, you can also prepare a pull request with changes to the core documentation. GitHub's built-in text editor makes this especially easy, when you choose the “*Create a new branch for this commit and start a pull request*” option on saving. Small fixes for typos and the like are a matter of minutes when using that tool.

3.5.1.3 Code contributions

Here's a quick guide to improve the code:

1. Fork the repo, and clone the fork to your machine.
2. Add your improvements, the technical details are further below.
3. Run the tests and make sure they're passing (`invoke test`).
4. Check for violations of code conventions (`invoke check`).
5. Make sure the documentation builds without errors (`invoke build --docs`).
6. Push to your fork and submit a [pull request](#).

Please be patient while waiting for a review. Life & work tend to interfere.

3.5.2 Details on contributing code

This project is written in [Python](#), and the documentation is generated using [Sphinx](#). [setuptools](#) and [Invoke](#) are used to build and manage the project. Tests are written and executed using [pytest](#) and [tox](#).

3.5.2.1 Set up a working development environment

To set up a working directory from your own fork, follow [these steps](#), but replace the repository `https` URLs with `SSH` ones that point to your fork.

For that to work on Debian type systems, you need the `git`, `python`, and `python-virtualenv` packages installed. Other distributions are similar.

3.5.2.2 Add your changes to a feature branch

For any cohesive set of changes, create a *new* branch based on the current upstream `master`, with a name reflecting the essence of your improvement.

```
git branch "name-for-my-fixes" origin/master
git checkout "name-for-my-fixes"
... make changes...
invoke ci # check output for broken tests, or PEP8 violations and the like
... commit changes...
git push origin "name-for-my-fixes"
```

Please don't create large lumps of unrelated changes in a single pull request. Also take extra care to avoid spurious changes, like mass whitespace diffs. All Python sources use spaces to indent, not TABs.

3.5.2.3 Make sure your changes work

Some things that will increase the chance that your pull request is accepted:

- Follow style conventions you see used in the source already (and read [PEP8](#)).
- Include tests that fail *without* your code, and pass *with* it. Only minor refactoring and documentation changes require no new tests. If you are adding functionality or fixing a bug, please also add a test for it!
- Update any documentation or examples impacted by your change.
- Styling conventions and code quality are checked with `invoke check`, tests are run using `invoke test`, and the docs can be built locally using `invoke build --docs`.

Following these hints also expedites the whole procedure, since it avoids unnecessary feedback cycles.

3.6 Software License

Copyright 2015 - 2019 Jürgen Hermann

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License version 2 as published by the Free Software Foundation.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

The full LICENSE file and source are available at

<https://github.com/jhermann/rituals>

3.6.1 Full License Text

```
GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc., <http://fsf.org/>
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
```

(continues on next page)

(continued from previous page)

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains

(continues on next page)

(continued from previous page)

a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based

(continues on next page)

(continued from previous page)

on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under

(continues on next page)

(continued from previous page)

this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among

(continues on next page)

(continued from previous page)

countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least

(continues on next page)

(continued from previous page)

the "copyright" line and a pointer to where the full notice is found.

```
{description}
Copyright (C) {year} {fullname}
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License version 2 as published by the Free Software Foundation.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
{signature of Ty Coon}, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

4.1 Tools

- Cookiecutter
- PyInvoke
- pytest
- tox
- Pylint
- twine
- bpython
- yolks3k

CHAPTER 5

Indices and Tables

- genindex
- modindex
- search

r

- rituals, 15
- rituals.acts, 16
 - rituals.acts.basic, 16
 - rituals.acts.devpi, 16
 - rituals.acts.documentation, 16
 - rituals.acts.github, 16
 - rituals.acts.inspection, 16
 - rituals.acts.jenkins, 16
 - rituals.acts.pkgdeb, 17
 - rituals.acts.releasing, 17
 - rituals.acts.testing, 17
- rituals.config, 22
- rituals.easy, 22
- rituals.util, 17
 - rituals.util.antglob, 19
 - rituals.util.filesys, 19
 - rituals.util.notify, 20
 - rituals.util.scm, 17
 - rituals.util.scm.base, 17
 - rituals.util.scm.git, 18
 - rituals.util.scm.null, 18
 - rituals.util.shell, 20
 - rituals.util.which, 21

A

add_collection() (rituals.easy.Collection method), 22
add_dir2pypath() (in module rituals.util), 17
add_file() (rituals.util.scm.git.GitProvider method), 18
add_file() (rituals.util.scm.null.NullProvider method), 18
add_task() (rituals.easy.Collection method), 23
auto_detect() (in module rituals.util.scm), 17

B

banner() (in module rituals.util.notify), 20

C

capture() (in module rituals.util.shell), 20
Collection (class in rituals.easy), 22
commit() (rituals.util.scm.git.GitProvider method), 18
commit() (rituals.util.scm.null.NullProvider method), 18
configuration() (rituals.easy.Collection method), 23
configure() (rituals.easy.Collection method), 23

D

DocsUploader (class in rituals.acts.documentation), 16

E

error() (in module rituals.util.notify), 20
excludes() (in module rituals.util.antglob), 19

F

fail() (in module rituals.easy), 25
failure() (in module rituals.util.notify), 20
FileSet (class in rituals.util.antglob), 19
from_module() (rituals.easy.Collection class method), 23

G

get_devpi_url() (in module rituals.acts.devpi), 16
get_egg_info() (in module rituals.acts.releasing), 17
get_project_root() (in module rituals.config), 22
get_pypi_auth() (in module rituals.acts.documentation),
16
GitProvider (class in rituals.util.scm.git), 18

I

included() (rituals.util.antglob.FileSet method), 19
includes() (in module rituals.util.antglob), 19
info() (in module rituals.util.notify), 20

K

key (rituals.util.scm.git.GitProvider attribute), 18
key (rituals.util.scm.null.NullProvider attribute), 18

L

load() (in module rituals.config), 22

N

NullProvider (class in rituals.util.scm.null), 18

P

pep440_dev_version() (rituals.util.scm.git.GitProvider
method), 18
pep440_dev_version() (rituals.util.scm.null.NullProvider
method), 18
pretty_path() (in module rituals.util.filesys), 19
provider() (in module rituals.util.scm), 17
ProviderBase (class in rituals.util.scm.base), 17
pushd() (in module rituals.easy), 25
pushd() (in module rituals.util.filesys), 19

R

rituals (module), 15
rituals.acts (module), 16
rituals.acts.basic (module), 16
rituals.acts.devpi (module), 16
rituals.acts.documentation (module), 16
rituals.acts.github (module), 16
rituals.acts.inspection (module), 16
rituals.acts.jenkins (module), 16
rituals.acts.pkgdeb (module), 17
rituals.acts.releasing (module), 17
rituals.acts.testing (module), 17
rituals.config (module), 22

- rituals.easy (module), 22
- rituals.util (module), 17
- rituals.util.antglob (module), 19
- rituals.util.filesys (module), 19
- rituals.util.notify (module), 20
- rituals.util.scm (module), 17
- rituals.util.scm.base (module), 17
- rituals.util.scm.git (module), 18
- rituals.util.scm.null (module), 18
- rituals.util.shell (module), 20
- rituals.util.which (module), 21
- run() (in module rituals.util.shell), 20
- run() (rituals.util.scm.base.ProviderBase method), 17
- run_elective() (rituals.util.scm.base.ProviderBase method), 17

S

- search_file_upwards() (in module rituals.util), 17
- serialized() (rituals.easy.Collection method), 24
- set_flat_layout() (in module rituals.config), 22
- set_maven_layout() (in module rituals.config), 22
- subcollection_from_path() (rituals.easy.Collection method), 24
- subtask_name() (rituals.easy.Collection method), 24

T

- tag() (rituals.util.scm.git.GitProvider method), 18
- tag() (rituals.util.scm.null.NullProvider method), 18
- task() (in module rituals.easy), 24
- task_names (rituals.easy.Collection attribute), 24
- task_with_config() (rituals.easy.Collection method), 24
- to_contexts() (rituals.easy.Collection method), 24
- transform() (rituals.easy.Collection method), 24

U

- upload() (rituals.acts.documentation.DocsUploader method), 16
- url_as_file() (in module rituals.util.filesys), 19

W

- walk() (rituals.util.antglob.FileSet method), 19
- warning() (in module rituals.util.notify), 20
- watchdogctl() (in module rituals.acts.documentation), 16
- which() (in module rituals.util.which), 21
- whichall() (in module rituals.util.which), 21
- WhichError, 21
- whichgen() (in module rituals.util.which), 21
- workdir_is_clean() (rituals.util.scm.git.GitProvider method), 18
- workdir_is_clean() (rituals.util.scm.null.NullProvider method), 18